

LTWR400 / LTWR600  
LTWR400-PC / LTWR600-PC  
LTWR800 / LTWR1000  
LTWR800-PC / LTWR1000-PC

## Litetower Path Light 240v INSTRUCTIONS



**WARNINGS**  
PLEASE READ THESE INSTRUCTIONS CAREFULLY BEFORE COMMENCING ANY WORK



- This is a Class I product and must be earthed.
- This unit **must** be fitted by a competent and qualified electrician.
- Install in accordance with IEE wiring regulations and current Building Regulations
- To prevent electrocution, switch off mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge.
- This light fitting should be connected to a circuit with a 30Ma RCD fitted.
- If replacing an existing fitting, make a careful note of the connections.
- When changing the bulb, always switch off at the mains & allow the bulb to cool before handling.
- All connections should be made as watertight as possible to avoid electrical shortage
- Always use the correct type & wattage of bulb. Never exceed the wattage stated.
- The unit may get warm whilst on for a period of time.

**Materials:** Anodised Aluminium & Frosted Glass

**Voltage:** 220-240v 50Hz

**Max. Wattage:** 35W

**Lamp Fitting:** ES / E27

**Recommended Lamp:** LED

**IP Rating:** IP65

**Product Height:** 400mm / 600mm / 800mm / 1000mm

**Sensor:** Photocell (Dusk to Dawn) OPTIONAL



**3 YEAR  
GUARANTEE**

see website for  
more details

**Producer Registration Number:  
WEE/KC3440XY**

### CLEANING:

Occasional cleaning and care is recommended for this product. Please refer to our website for the best way to clean different materials.

**RETURNS – Please contact us by phone or email**  
sales@speedystreetsolutions.com


Tel: +44 1904786861

Email: sales@speedystreetsolutions.com



**Full product range & more information:**

## INSTALLATION:


- A length of 240v 3 core cable is supplied. Junction box provided with Photocell versions.
- Connect Earth Input wire to green / yellow  terminal on the connection block
- Connect Live input wire to brown (L) terminal on the connection block
- Connect Neutral input wire to blue Neutral (N) terminal on the connection block.  
**PHOTOCELL VERSIONS ONLY – NOTE:** The Photocell will be pre-wired to a 4 way connector block, therefore one terminal will contain two neutral wires. This **MUST NOT** be changed.
- Check that you have correctly identified the supply wires, the connections are tight and that no loose strands have been left out of the connection block.
- Unscrew the head carefully & install an ES/E27 (screw type) bulb into the bulb holder.
- Carefully place the rubber seal between the body and head to ensure a waterproof seal and screw on head securely.

**IMPORTANT: When securing the base, do not overtighten as this could lead to fracture. Do not use high power electric socket tools.**

### NOTES:

- To ease with head / body assembly, a small amount of oil such as '3 in 1' can be applied to the neck thread.
- If the head is accidentally cross-threaded when securing to the body, turn anti-clockwise and try again – it should then screw on easily.
- Product base is fixed to the main part of the light. 4 x Anchor bolts can be used to fix the product to the relevant surface (not supplied).
- The rubber seal supplied must be installed between the head and the body and **MUST NOT** be twisted to ensure a waterproof connection.
- Photocell versions - photocell is factory pre-set and cannot be changed

### WIRING DIAGRAMS:

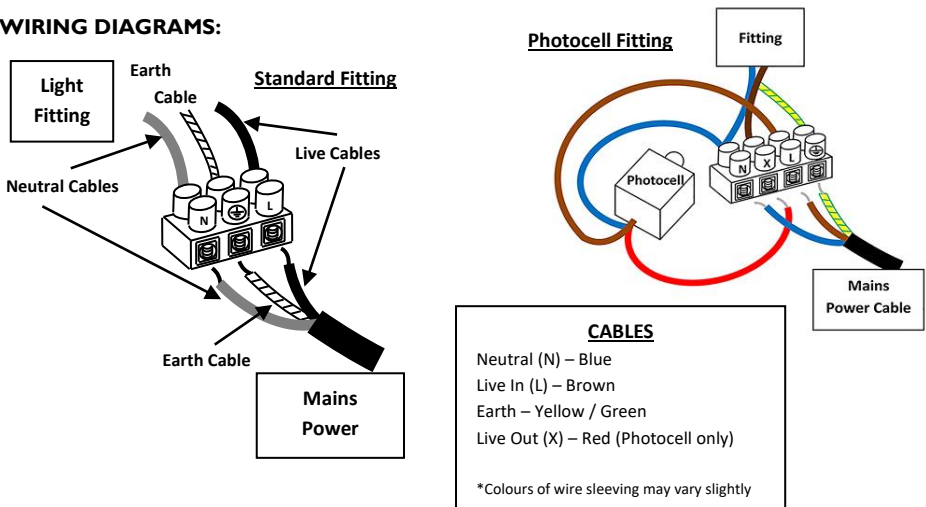

**Full product range & more information:**