




Rockingham Bench 300 1750mm

Galvanised, Galvanised & Colour or Stainless

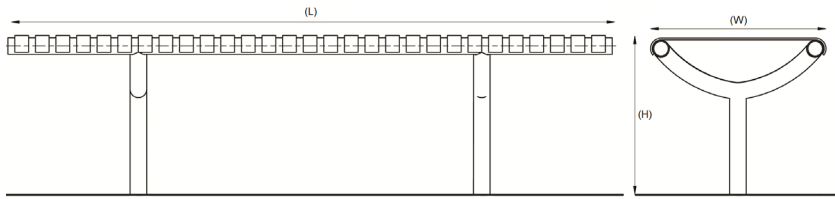

With a simple and stylish design the Rockingham Bench 300 is ideal for busy public areas such as schools and shopping centres.

Manufactured from galvanised mild steel as standard, it will look good for years with only minimal maintenance. Supplied Concrete in only, the bench is available in stainless steel and colour coated versions (please state BS/RAL number at time of order).

Images shows multiple benches installed as a continuous run.

Available concrete in and bolt down.



<u>Part Number</u>	<u>Description</u>	<u>Weight (kg)</u>
138 117 014	Rockingham Bench 300, Galvanised - Bolt Down	31kg
138 117 014C	Rockingham Bench 300, Galvanised & Colour - Bolt Down	31kg
138 117 018	Rockingham Bench 300, Stainless Steel Grade 304 - Bolt Down	31kg
138 117 014R	Rockingham Bench 300, Galvanised - Concrete In	31kg
138 117 014RC	Rockingham Bench 300, Galvanised & Colour - Concrete In	31kg
138 117 018R	Rockingham Bench 300, Stainless Steel Grade 304 - Concrete In	31kg

Product details





- 1750mm x 398mm x 444mm (length x width x height)
- 444mm (seat height)
- Galvanised/galvanised & coated finish complete with plastic end caps
- Concrete in 300mm (below ground)
- Round flange plate – 133mm x 5mm
- Each bench requires 6 x 12mm bolts

Installation & use

Supplied fully welded for easy installation on site.

The Rockingham Bench requires a trench of a least 1000mm x 600mm x 300mm deep for casting into concrete.

Clean off any concrete splashes after installation. Always allow sufficient time for concrete to cure before usage.

This product is guaranteed for 12 months (if installed and used correctly).

